


APPLICATION

NEMA-4X vapor tight enclosure suitable for areas prone to dirt and moisture conditions.
NSF rated for food processing, cold storage, adverse manufacturing and wash down areas.
Efficient T8 or T5 lamp, electronic ballast and optional specular reflector.
Suitable for suspended mounting applications.

Construction

IP67 certified and 5VA flammability rated with no exposed parts to corrode.
Housing molded glass fiber reinforced polyester.
Injection molded lens is clear 100% virgin impact resistant acrylic, 91.5% light transmission.
Stainless steel latches hold lens firmly in place.
Poured in place gasket and cam latches seal the enclosures from most hostile environments.
Stainless hardware installed for ease of installation with aircraft cable or chain.
Designed around T8 and T5 lamps for long-term energy savings.
Knockouts and end plugs provided for easy wiring access.

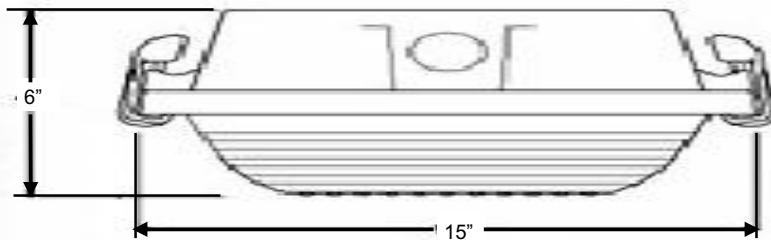


FEATURES

- IP67 RATED ENCLOSURE
- SUITABLE FOR WET LOCATIONS
- IDEAL FOR COLD STORAGE
- LAMP AND BALLAST OPTIONS
- DIRT AND MOISTURE RESISTANT
- CORROSION FREE
- EASY ACCESSIBLE LAMPS
- QUICK MOUNTING DESIGN

Photometry Pending


Order Logic

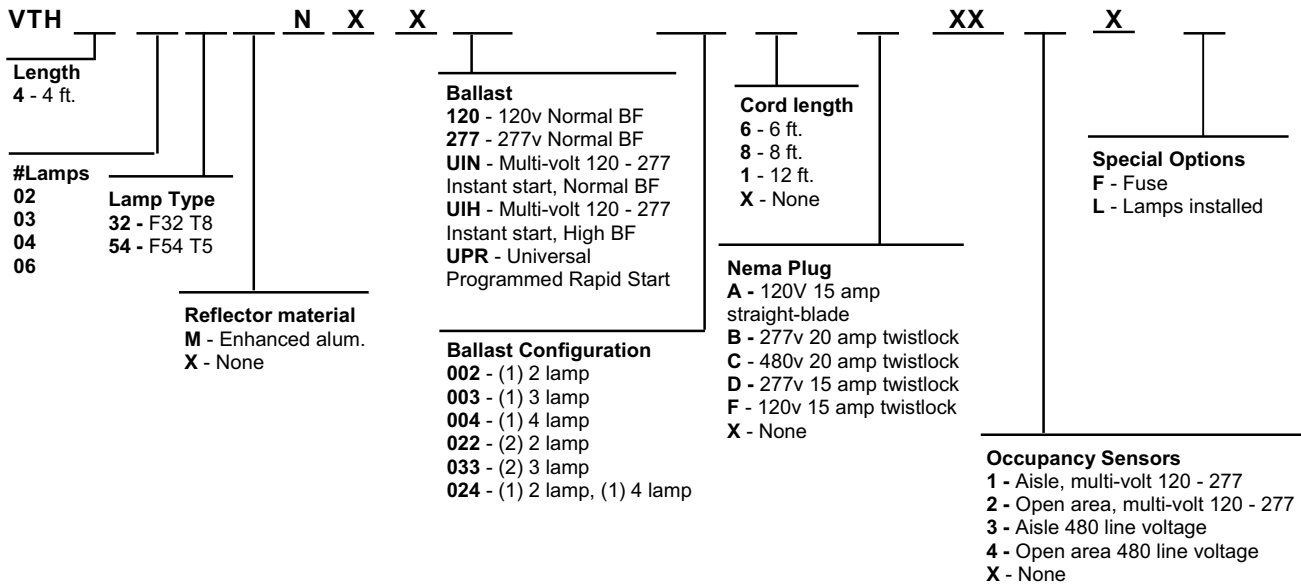

Note: some lamp combinations are not recommended for high ambient applications.
Consult factory.
Refer to options terminology matrix for additional options


VTH 4-LAMP T5 HO

Total Rated lamp Lumens	19600 (4 lamps)
Total Luminaire Efficiency	93.1 %
Luminaire Efficacy Rating (LER)	81
CIE Type	Direct
Spacing Criteria (0-180)	1.26
Spacing Criteria (90-270)	1.20
Spacing Criteria (Diagonal)	1.30
Basic Luminous Shape	Rectangular/Sides
Luminous Length (0-180)	4.23 ft
Luminous Width (90-270)	1.13 ft
Luminous Height	0.25 ft

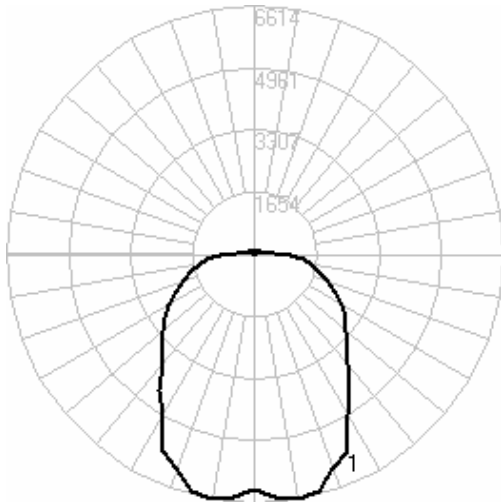


VTH 4-LAMP T8

Total Rated lamp Lumens	11800 (4 lamps)
Total Luminaire Efficiency	82.1 %
Luminaire Efficacy Rating (LER)	97
CIE Type	Direct
Spacing Criteria (0-180)	1.24
Spacing Criteria (90-270)	1.06
Spacing Criteria (Diagonal)	1.20
Basic Luminous Shape	Rectangular/Sides
Luminous Length (0-180)	4.23 ft
Luminous Width (90-270)	1.13 ft
Luminous Height	0.25 ft

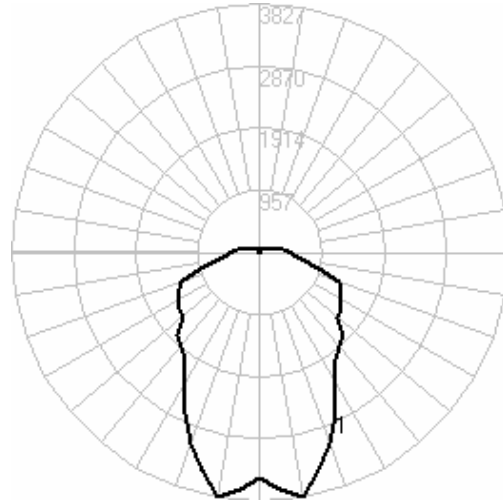


VTH 6-LAMP T5 HO

Total Rated lamp Lumens	29400 (6 lamps)
Total Luminaire Efficiency	91.4 %
Luminaire Efficacy Rating (LER)	82
CIE Type	Direct
Spacing Criteria (0-180)	1.24
Spacing Criteria (90-270)	1.38
Spacing Criteria (Diagonal)	1.42
Basic Luminous Shape	Rectangular/Sides
Luminous Length (0-180)	4.23 ft
Luminous Width (90-270)	1.13 ft
Luminous Height	0.25 ft

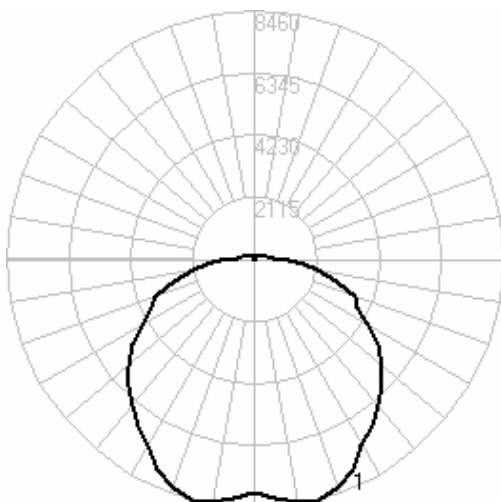

VTH 6-LAMP T8

Total Rated lamp Lumens	17700 (6 lamps)
Total Luminaire Efficiency	77.3 %
Luminaire Efficacy Rating (LER)	97
CIE Type	Direct
Spacing Criteria (0-180)	1.28
Spacing Criteria (90-270)	1.30
Spacing Criteria (Diagonal)	1.38
Basic Luminous Shape	Rectangular/Sides
Luminous Length (0-180)	4.23 ft
Luminous Width (90-270)	1.13 ft
Luminous Height	0.25 ft

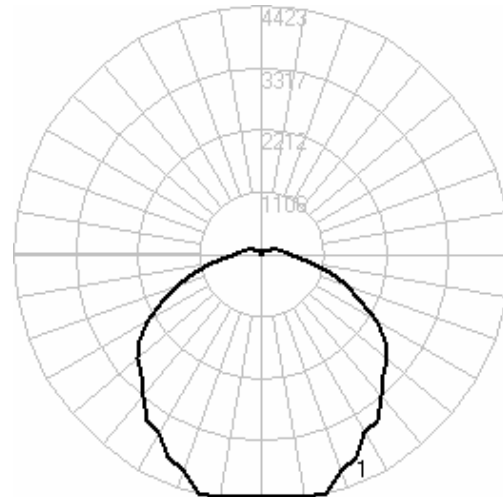

Mor-Lite, inc.

Greenville, SC Park City, UT Houston, TX

www.mor-lite.com (801) 597-8300 johnhuebner@mor-lite.com